



UdiINSULATION SYSTEMS

Last a lifetime – with
ecological, high-performance,
wood fibres

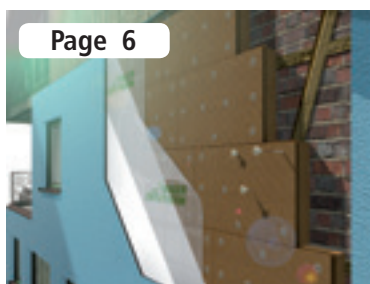

UdiProduct Overview / Wood-fibre insulation

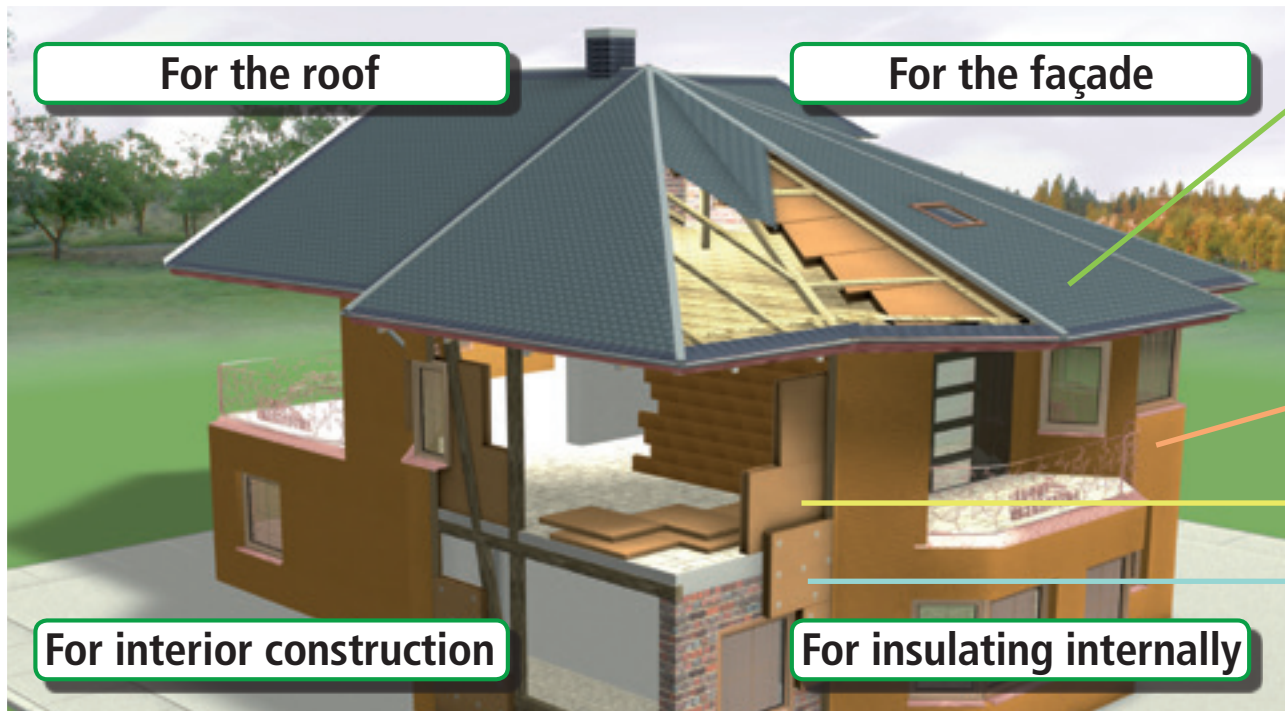

Page 6

UdiRECO® SYSTEM

External thermal insulation composite system with intelligent levelling compensation



Page 7

UdiIN RECO® SYSTEM


The interior insulation system – specially designed for uneven surfaces



Page 10

UdiFRONT® SYSTEM


External thermal insulation composite system with a 15 year guarantee

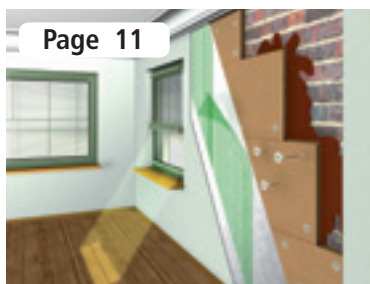

Page 11

UdiIN® SYSTEM

Interior insulation system with a 15 year guarantee

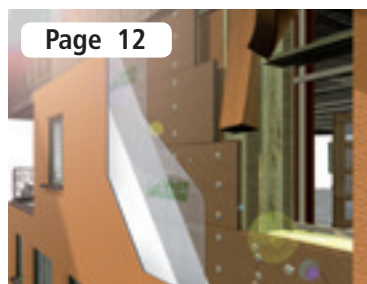

Page 12

UdiSPEED® SYSTEM


The efficient insulation system for timber-frame buildings



Page 13

UdiIN 2CM® SYSTEM


The quick and slim internal insulation system

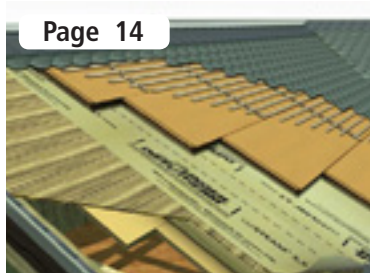

Page 14

UdiCLIMATE® SYSTEM

The interior insulation system with integrated climate chambers

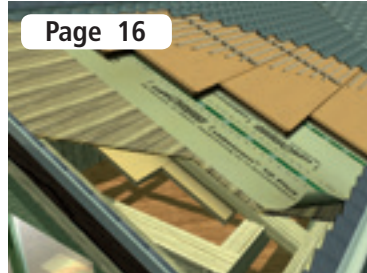

Page 16

UdiTOP® SYSTEM

The complete program for your roof



Page 17

UdiSTEP® SYSTEM

Wood-fibre, floor insulation

For the roof:

UdiFLEX® SYSTEM

Flexible planning with a flexible insulation to meet the highest of demands

UdiTOP® SYSTEM

The complete program for your roof

For the façade:

UdiRECO® SYSTEM

External thermal insulation composite system with intelligent levelling compensation

UdiFRONT® SYSTEM

External thermal insulation composite system with a 15 year guarantee

UdiSPEED® SYSTEM

The efficient insulation system for pre-fabricated, timber-frame buildings

For interior construction:

UdiCLIMATE® SYSTEM

The interior insulation system with integrated climate chambers

UdiSTEP® SYSTEM

Wood-fibre, floor insulation

For interior insulation:

UdiIN® SYSTEM

Interior insulation system with a 15 year guarantee

UdiIN RECO® SYSTEM

The interior insulation system – specially designed for uneven surfaces

UdiIN 2CM® SYSTEM

The quick and slim internal insulation system



EDITORIAL



Anka Unger
Managing director



Dipl.-Ing. Bernd Unger
Company founder
Research / Development

Dear Reader,

It's great that you are interested in our products and in a healthy option to insulate your building.

We are a family-run business in the second generation. As early as 1989, the company founder, Bernd Unger, developed the first wood-fibre insulation system for façades that was suitable for direct rendering. That is why we include the words „**The Original**“ in our logo.

Since 1989 we have been a system provider and manufacturer of a whole range of environmentally friendly, innovative, natural wood-fibre insulation systems. Our patented products are used to insulate façades, the interior side of external walls, drywall constructions and roofs. Our first insulation system, so to speak the mother of all our systems, was **UdiFRONT®**. This system is so good that it is still in use and continues to reflect our commitment to producing high quality products. It is comprised of various layers of specially pressed and heat-treated wood fibres. The special manufacturing process ensures a high level of durability, provides the ability to relieve tensions in the façade and optimises the structural properties.

Through our research on a wide range of materials and the experience gained from their practical application, we continuously develop additional, complete system, solutions with fully coordinated material combinations for our customers. Softwood fibres, with their unbeatable natural properties, are the basis for all our products. Approximately 80,000 completed construction projects with satisfied developers, architects and tradesmen are the proof of the excellent quality and high performance of our **UdiWOOD-FIBRE®** insulation products.

Increasing numbers of people are taking their responsibility for the future seriously and insulating their properties with sustainable, innovative insulation systems.

Dear reader, we would like to work together with you as equals and accompany you on the road to a more comfortable future.

Our brochure **UdiINSULATION SYSTEMS®** will take you through to your choice of product.

That is our aim!

“He who chooses the beginning of the road chooses the place it leads to.”

Harry Emerson Fosdick

UdiCONTRIBUTION TO SUSTAINABILITY

From softwood to a high-performance insulation material



Our wood-fibre insulation elements for **UdiRECO®**, **UdiSPEED®**, **UdiIN 2CM®** and **UdiCLIMATE®** are produced using special equipment. All of our fine quality renders/plasters, paints and filler products are produced according to our own specifications. These products are all standard system components.

The raw materials for our rigid, render-bearing and warp-free insulation boards are comprised to 98% from coniferous timber waste and in the dry process for our flexible insulation boards to 94%. As additives, we employ a maximum of 1.5 % PVAC adhesive to bond the layers of the render-bearing elements and < 6 % textile binder fibres for the flexible elements.

Our systems are always manufactured to comply with CE-conformity standards and the material quality is continually controlled and the systems regularly monitored. Tested and approved constructions can be found in our current planning documentation or in the internet under www.udidaemmsysteme.de.

Detailed test reports, expert assessments and official approvals are available upon request.

The task of helping to retain the value of existing and newly-constructed buildings whilst at the same time protecting natural resources remains challenging in these times of continuing energy wastage. **UdiDÄMMSYSTEME** makes a contribution to achieving this difficult goal through our research, production and marketing of environmentally-friendly, wood-fibre insulation systems.

UdiDÄMMSYSTEME means:


Increased living quality for you and sustainable climate protection for Mother Earth.

Wood fibres grow in natural coniferous trees, accumulate as a waste product in saw mills, store the absorbed CO₂ as a refined insulation material within their structure and make a life-long contribution to CO₂ storage and energy saving. Afterwards they can be returned to the natural cycle by burning or as compost.

That's what we call sustainability!

UdiRECO® SYSTEM

External thermal insulation composite system with intelligent levelling compensation

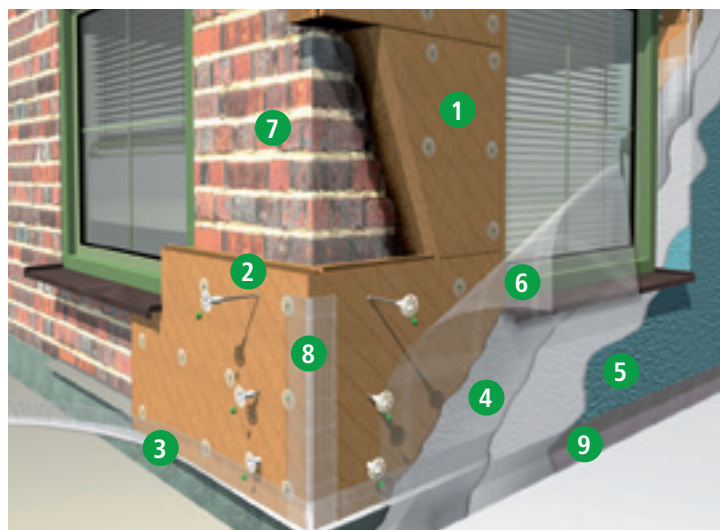

- 1 UdiRECO® Wood-fibre insulation board
- 2 UdiASSEMBLY® SDM Reco (adjustable fixing – masonry)
- 3 UdiBASE® Plinth-End Cap Profile variable
- 4 UdiFOUNDATION COAT®
- 5 UdiPERL® Primer and Structured Fine Plaster
- 6 UdiREINFORCEMENT® Strengthening Mesh
- 7 Substrate: Masonry – rendered/non-rendered
- 8 UdiREINFORCEMENT® Corner Protection Profile
- 9 Perimeter insulation with UdiPlinth sealing slurry® and plaster coating

The combination makes the difference.

The insulation system UdiRECO® is made of two different insulation layers. The flexible and soft layer provides a snug fit to the substrate and ensures a perfect insulating fit. The pressure-resistant, render-bearing insulating layer has a tongue and groove profile for optimal wind-tightness. The reinforcing render is applied to this layer and finished with a coat of fine plaster, which is available in various colours and granularities.

→ The advantages

- The soft insulation layer compensates for uneven surfaces
- Façades are better insulated than the current German energy regulations require
- Façades are less likely to develop algae or moss growth due to the “hot water bottle effect” (high thermal storage)
- Façades can be adjusted to an accuracy of a few millimetres
- No back-draughts
- No mould growth caused in living areas or in the construction
- Improved soundproofing
- Quick installation as adhesive is not required

Components

Coniferous wood
max. 0.5 % Paraffin
1.5 % PVAc (For bonding the insulation layers)
< 6 % Binding fibres in the sandwich construction

Technical data

Thermal conductivity Declared value λ_D	0,038/ 0,048 W/mK (compressed)
Design value λ	0,039 / 0,050 W/mK
Vapour diffusion resistance μ	1 / 5
Condensation retention capacity	ca. 20 % of own weight
Specific enthalpy capacity c	2100 J/kg/K
Apparent density	ca. 55 / 270 kg/m³
Euroclass fire rating DIN EN 13501-1	E

Dimensions

Format 1.300 x 790 mm, Coverage: 1.290 x 780 mm
Tongue and groove around the whole circumference
Insulation thicknesses: 80, 100, 120, 140, 160, 180 and 200 mm



The UdiRECO^{SYSTEM} adapts to the surface to provide a snug, wind-tight fit

UdiIN RECO® SYSTEM

*The interior insulation system –
specially designed for uneven surfaces*

**Guaranteed
15 Years**
Complete system installed by a
licensed specialist firm
Mould-free

For insulating internally

Please note the guarantee conditions on page 9



- 1 **UdiRECO®** Wood-fibre insulation board with substrate level-ling compensation
- 2 **UdiASSEMBLY®** SDM Reco (adjustable fixing – masonry)
- 3 **UdiFOUNDATION COAT®** mineral, vapour-retarding render
- 4 **UdiREINFORCEMENT®** Strengthening Mesh
- 5 Substrate: Masonry – rendered/non-rendered



The insulation system can also be used for the room-side insulation of external walls.

Thermal storage, the intermediate storage of moisture, capillary-active and vapour-permeability - these are the benefits of the **UdiIN RECO®** interior insulation system. In contrast to foam or mineral-fibre insulation boards, the condensation which develops within system is absorbed, stored temporarily and through the natural drying of the wood fibres is transported back into the room air or to the exterior via the capillary effect.

The insulated component is protected from the excessive build-up of moisture.

Insulating internally using **UdiIN RECO®** wood-fibre insulation boards does not require a structurally questionable vapour barrier. Instead the functional, mineral render coating **UdiFOUNDATION COAT®** is applied to the whole surface. This fulfils the functions of a finishing coat, a plaster bearer and provides a targeted regulation of the moisture transport by means of its intelligent vapour-retarding properties.

Based on over 20 years of proven practise, we offer you a 15-year guarantee that there will be no mould growth within the construction. This has been proven in a long-term study, over a period of 10 years, on an installed system; through our practical experience over the last two decades and through the craftsmanship of our network of licensed **UdiCERTIFIED INSTALLERS**.



→ The advantages

- Adjustable and compensating – for uneven interior walls
- No mould growth, guaranteed for at least 15 years
- Wind-tight and compact against the substrate
- No adhesive and no moisture from a mortar bed
- No bearer structures required
- Directly affixed to the interior of the wall and then adjusted
- Capillary-active and diffusion-permeable
- No installation-related drying times
- Suitable for insulating thick and thin walls from the inside
- Resonance-free soundproofing due to the combination design
- The vapour-retarding plaster coat regulates water vapour levels
- Free choice of finishing coat using lime, clay, paint, wallpaper or tiles or plaster
- Ideal for listed buildings

Udi LICENCING 2-Day Seminar

Day 1 – Theory – At the UdiDÄMMSYSTEME GmbH headquarters

- Why do we insulate?
- The differences between the various **Udi INSULATION SYSTEMS**
- Manufacture of the **Udi PRODUCTS**
- Structural physics „SPECIAL“
- Experiment: Sound / Water vapour / Fire test
- Potential applications / Areas of application / Roof / Façade / Interior construction
- Calculation / Price comparison
- Guarantee system 15 years
- Building reports – Interior insulation
- Sales arguments / Unique selling points
- References

Day 2 – On-site training – At your own building project site

(You can specify the date for this training day)

- Practical implementation / Detailed installation - special features / Joints and abutments
- Survey of the building



LIZENZIERTER
Udi FACHHANDWERKER

Lizenz.-Nr. für

Udi IN® SYSTEM Udi RECO® SYSTEM
Udi IN RECO® SYSTEM
Udi IN 2CM® SYSTEM

der Teilnehmer/ Firma

.....

.....

Anwendung

Verarbeitung

Detaillösungen

Systemkomponenten

Bauphysik

Kalkulation

Argumentation



ist berechtigt, sich als **Udi FACHHANDWERKER** zu bezeichnen und die oben genannten Systeme zu verarbeiten. Umfangreiche Kenntnisse in Theorie, Praxis und Bauphysik wurden erfolgreich für alle **Udi DÄMMSYSTEME** nachgewiesen.

Der lizenzierte **Udi FACHHANDWERKER** steht mit seinem Namen und mit seinen erworbenen Kenntnissen und Fertigkeiten für höchste Verarbeitungsqualität und Sicherheit.

ORT, DATUM


Udi DÄMMSYSTEME GmbH

UdiDÄMMSYSTEME GmbH
Oberhofener Straße 2
09117 Chemnitz
Deutschland

Tel. 0371 - 33 71 38 - 0
Fax 0371 - 33 71 38 - 64
info@udidammssysteme.de
www.udidammssysteme.de

Udi ARCHITECTS 1-Day Seminar

- Why do we insulate?
- The differences between the various **Udi INSULATION SYSTEMS**
- Exterior and interior insulation
- Fibre manufacturing - Wet and dry processes
- Structural physics „SPECIAL“
- Experiment: Sound / Water vapour / Fire test
- Potential applications / Areas of application / Roof / Façade / Interior construction
- Practical implementation / Detailed installation - special features / Joints and abutments
- Survey of the building

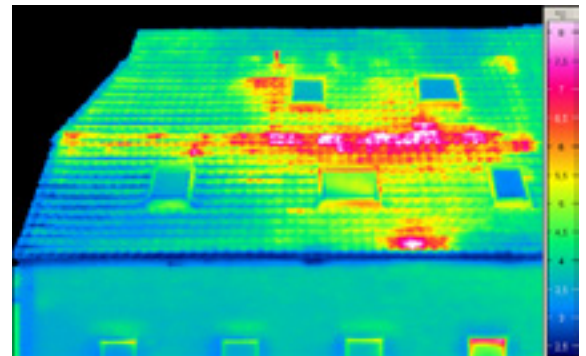

Udi BUILDING SITE TRAINING

- Individual training in the installation of the **UdiDÄMMSYSTEME** incl. a detailed discussion of all the installation issues relating to the project
- Details of the duration and cost of this training are available on request



UdiGUARANTEES®

*15 years of peace of mind –
Insulate with our guarantee package*

15 YEARS

Insulate with our additional guarantee package

The ETICS **UdiFRONT®** and the interior insulation systems **UdiIN®** and **UdiIN RECO®**, made from natural wood fibres, have been in use successfully for twenty years and have established themselves in the top class of insulation products. We are so convinced of the quality of our products that we offer developers the choice of an optional guarantee package, when the complete system installation is conducted by a **UdiCERTIFIED INSTALLER**.



Ask about our 15-year GUARANTEE for:

More than 15 years mould-free

- **unique freedom from mould-growth guarantee**
- lifelong, health-promoting, insulation for you, your family and your children
- excellent vapour permeability and moisture transport ensure no mould development

More than 15 years warp-free

- **no warping of the insulation boards – guaranteed!**
- storm-proof façade up to wind speeds of 300 km/h with our **UdiFRONT®** SYSTEM
- smooth walls with no warping or bulging
- the fixing heads and board edges stay concealed permanently
- visibly warp-free surfaces - even when coated in very dark colours

More than 15 years crack-free

- together with the insulation boards, our specially developed finishing coatings can absorb movements in the substrate
- consistently dry building substance with no condensation
- crack-free without any gap development
- over 2 million square metres installed with our Original-System – without any cracks developing

Free choice of colours

- your individual dream colours for the façade are available in the complete colour spectrum
- individual colour-choice for your living areas in combination with **UdiIN®** SYSTEM
- choose from over 1000 colour shades, for example the **UdiCOLOR®** SYSTEM or NCS-System
- all colours, from dark to light, are, when technically feasible, available without any restrictions in the colour luminosity

To ensure the longevity of the system, all building system components and their method of installation must correspond with our licensing specifications and be carried out by a **UdiCERTIFIED INSTALLER**. All construction components must comply with our license conditions. All installed components must correspond to our complete systems.

Developers will receive the full 15-year guarantee for the installed insulation system, if the qualified **UdiCERTIFIED INSTALLER** employs all relevant system components from our product range. A special quality assurance system is an integral component in ensuring a correct installation and the longevity of the system. On completion, the developer will receive the guarantee certificate from the **UdiCERTIFIED INSTALLER**.

UdiFRONT® SYSTEM

Complete façade protection at its best



- 1 Wood-fibre insulation board **UdiFRONT®**
- 2 System fixings – **UdiASSEMBLY® SDH** for timber substrates or **SDM** for masonry to affix the insulation boards
- 3 The boards are coated with our specially developed **UdiFOUNDATION COAT®** and **UdiREINFORCEMENT® Strengthening mesh** to hinder the development of surface cracks
- 4 The system is finished with a high performance, fine quality plaster coating from the **UdiPERL®** range. This rainproof and air-permeable plaster is available in a large choice of structured finishes and colour shades from the **UdiCOLOR® SYSTEM** (when technically possible, any colour can be supplied, subject to a surcharge). A finishing coat of paint is recommended for very dark coloured plasters to provide a more brilliant colour finish. Optionally, our silicate plaster (**UdiSIKATO®**) or a similar product, may also be used.

The **UdiFRONT®** SYSTEM is an efficient, premium quality, façade insulation system. Its natural wood fibres, of different densities, harmonize with our tried and tested, specially designed, fine quality plasters, which are available in a wide range of colours and structures. The system supports the open-diffusion and vapour-permeable characteristics of the walls, absorbs stresses in the construction and provides complete protection in the form of heat retention, shielding against cold in the winter and heat in the summer and excellent soundproofing. The result is a wonderful room climate.



The user will benefit from significant and permanent energy savings with the added benefit of reduced CO₂-emissions.

Developers will receive the 15-year guarantee for the installed insulation system from the **UdiCERTIFIED INSTALLER**. The guarantee covers freedom from mould growth, warping, the development of cracks and provides a full choice of colours without any restrictions on the luminosity.

→ The advantages

- made from natural coniferous softwood
- awarded the "natureplus Eco-label" (insulation board)
- recommended as early as 1999 by the environmental magazine ÖKOTEST as the best insulation system
- kind to the skin when handling or installing
- lower energy losses in relation to the building element
- amortisation after 5 years possible
- approved by the German Institute of Building Technology
- long-term experience
- more than 2 million m² installed
- soundproofing



Technical data **UdiFRONT®** SYSTEM

Thermal conductivity Declared value λ_D	0.043 W/mK
Thermal conductivity Design value λ	0.045 W/mK
Vapour diffusion resistance μ	5
Specific enthalpy capacity c	2100 J/kg/K
Apparent density	ca. 190-210 kg/m ³
Euroclass fire rating DIN EN 13501-1	E
Dimensions: Format 130 x 79 cm, 250 x 125 cm (60 mm), Tongue and groove around the whole circumference; Insulation thicknesses: 60, 80, 100 and 120 mm (use multiple layers for greater thicknesses)	

System approval

Z-33.47-663 for timber substrates



UdiFRONT® SYSTEM has established itself as an unbeatable insulation solution for timber-framed buildings.

Please note the guarantee conditions on page 9

UdiIN[®] SYSTEM

Interior insulation system with a 15 year guarantee

**15 Year
Guarantee**

Please note the guarantee conditions on page 9



For the demanding developer **UdiIN[®] SYSTEM** is the solution of choice for existing buildings which can not or should not be insulated externally e.g. listed buildings, those abutting property boundaries or simply to retain the current optical look.

The system's breathability, soundproofing and active vapour diffusion properties with an integrated, water vapour retarder ensure a controlled moisture level within the insulation layer, a short drying-out period and provide a warm and comfortable room climate.

→ The advantages

- specially-designed system
- in use for 20 years
- the solution for rooms with limited space
- universally applicable
- diffusion-permeable and 'breathable'
- reduces noise levels
- stores heat
- all types of finishing coatings possible

Technical data UdiIN[®] SYSTEM


Thermal conductivity Declared value λ_D	0.043 W/mK
Thermal conductivity Design value λ	0.045 W/mK
Vapour diffusion resistance μ	5
Specific enthalpy capacity c	2100 J/kg/K
Apparent density	ca. 190-210 kg/m ³
Euroclass fire rating DIN EN 13501-1	E
Dimensions: Format 130 x 79 cm,	
Tongue and groove around the whole circumference	
Insulation thicknesses: 60, 80, 100 and	
120 mm (use multiple layers for greater thicknesses)	

System approval

Z-33.47-663 for timber substrates

- 1 Wood-fibre insulation board **UdiIN[®]**
- 2 **UdiASSEMBLY[®] SDM Fixing**
- 3 **UdiREINFORCE-MENT[®] Strengthening Mesh**
- 4 **UdiFOUNDATION COAT[®]**
- 5 **UdiLIVE[®] Loam Base Render**

Substrate (Masonry, half-timbered or timber-frame)

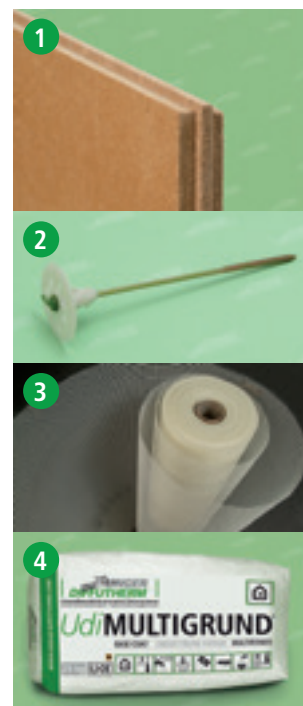

UdiFOUNDATION COAT[®] = intelligent vapour retarder + render-bearer

A special coating for interior insulation systems from **Udi-DÄMMSYSTEME**. This intelligent vapour retarder limits the level of condensation. It serves as a reinforcement coat and bearer layer for fine quality plasters, paint, wallpaper, tiles and other coatings.

Granularity: ca. 0.4 mm;


Compressive strength: ca. 4 - 9 N/mm²; μ -Value: ca. 125;

Reinforcement layer thickness: min. 4 mm (according to the required vapour retardation value)



UdiSPEED® SYSTEM

The efficient insulation system for timber-frame buildings

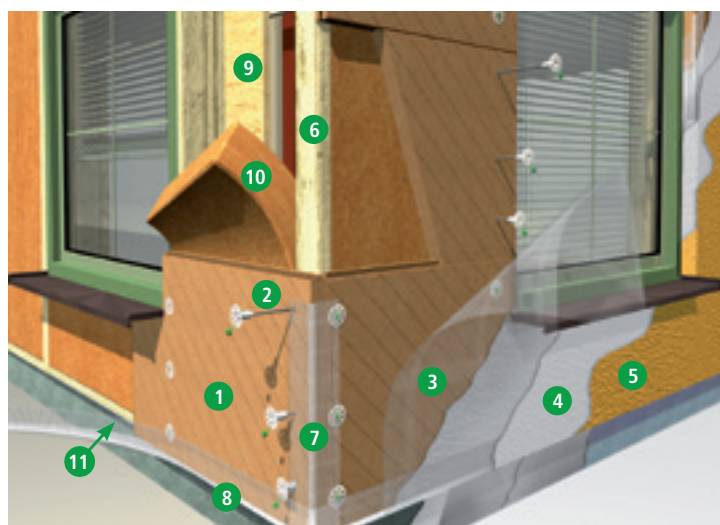

- 1 UdiSPEED® or UdiFRONT® Wood-fibre insulation board
- 2 UdiASSEMBLY® SDH (adjustable fixing – timber constructions) oder UdiASSEMBLY® Staples
- 3 UdiREINFORCEMENT® Strengthening Mesh
- 4 UdiFOUNDATION COAT®
- 5 UdiPERL® Fine quality plaster or similar
- 6 Substrate: Timber-frame construction, directly clad
- 7 UdiREINFORCEMENT® Corner Protection Profile
- 8 UdiBASE® Plinth End-Cap Profile variable
- 9 Bracing area with wood-based board
- 10 UdiFLEX® flexible wood-fibre insulation board for the void
- 11 UdiJOINTING TAPE®

The UdiSPEED® SYSTEM embodies our many years of experience in the field of timber constructions. The corresponding system components, such as fixings, connecting profiles and plaster coatings round off the vapour-permeable system. The tried and tested, easy to handle format with tongue and groove joints around the whole circumference provides stability and a formed fit without thermal bridges. The UdiSPEED® offers you top-quality combined with sophisticated thermal insulation technology.

Technical data UdiSPEED® SYSTEM

Thermal conductivity Declared value λ_D	0.048 W/mK
Thermal conductivity Design value λ	0.050 W/mK
Vapour diffusion resistance μ	5
Condensation retention capacity	ca. 20 % of own weight
Specific enthalpy capacity c	2100 J/kg/K
Longitudinal flow-resistance as a complete system	> 5 kNs/m ⁴
Apparent density	ca. 270 kg/m ³
Euroclass fire rating DIN EN 13501-1	E

Components:

Coniferous wood, max. 0.5 % Paraffin, 1.5 % PVAc (For bonding the insulation layers)

System approval

Z-33.47-663 for timber substrates

→ The advantages

- warp-free due to the diagonally grooved surface
- meets the highest demands of timber construction
- short drying times
- space-saving due to slim wall constructions
- healthy accommodation
- universal use for renovations



UdiSPEED® is suitable for installing directly to the substrate in new and existing timber constructions (e.g. here with a timber-frame building)



UdiIN 2CM[®] SYSTEM

The quick and slim internal insulation system

INNOVATION
Based on 25 years of experience

- Quick
- Slim
- Warm

For interior construction

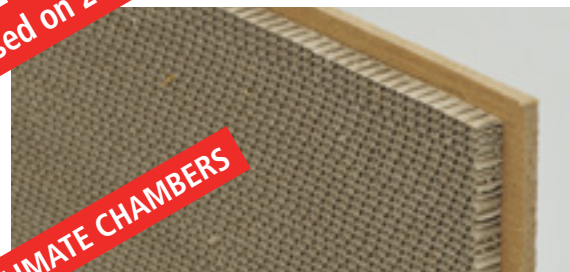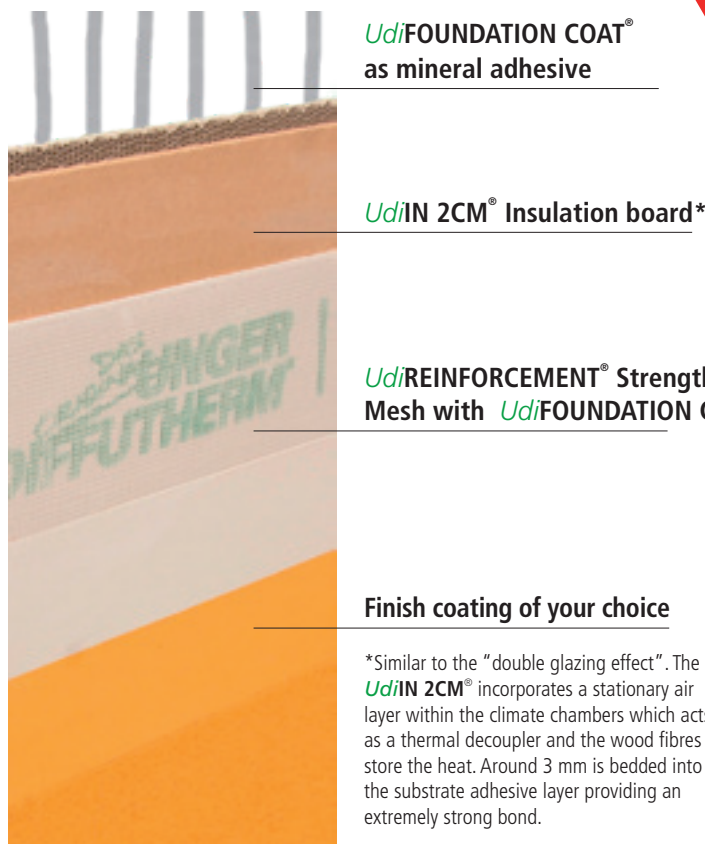

UdiIN 2CM[®] Insulation board*

Our interior insulation is not only simple and thereby cost-efficient to install but UdiIN 2CM[®] also provides decisive energy-saving benefits, especially in rooms that are only sporadically used and heated (assembly halls, residential rooms etc.).

The internally insulated rooms can be heated very quickly as the solid external walls must not be warmed along with the room. This factor is often overlooked and offers huge potential for saving energy.

In a test measurement on a building with traditional brick walls, the U-value improved from 1.3 before to 0.5 after the installation.

- Quickly installed without wall plugs
- Warm wall surfaces
- For every room where space is limited
- Increases the surface temperature
- Bridges cracks
- The sensation of cold disappears

→ Applications

- Listed buildings
- Private houses, apartments
- Schools, hospitals, kindergartens
- Community and assembly rooms
- Holiday homes, offices and many more

→ The advantages

- Easy installation
- Cost-saving attachment and fixing
- Sporadically used rooms warm up very quickly
- Perceptibly warmer exterior wall surfaces in winter
- Helps to save energy
- Reduces noise pollution within buildings
- Reduces e.g. the U-value of a sandstone wall by half!
- Impedes mould growth
- No restrictions in the choice of finishing coating

Of course, this principle can also be applied to ceilings and internal roof slopes in need of renovation.



This sight of this beautiful façade has been retained thanks to UdiIN 2CM[®] internal insulation

Technical data:

Thermal conductivity Design value λ : 0.070 W/mK

Apparent density wood fibre: 210 kg/m³

Thickness: 23 mm (3 mm in the adhesive bed)

Format: 115 x 75 cm

Euroclass fire rating - wood fibre as per DIN EN 13501-1: E

Waste Code as per EWC-Code: 030105, 170604

Wood fibre manufacture and conformity control as per DIN EN 13986


UdiCLIMATE[®] SYSTEM

The interior insulation system with integrated climate chambers

THE NEW WAY TO
BUILD – LIGHT & EASY



UdiCLIMATE[®] is applicable as an underside, roof insulation board or dry lining layer for walls



**Up to a 50%
reduction in
the sound
energy**

UdiCLIMATE[®] is an extremely versatile interior construction board that can be directly plastered. It can be used as an internal, rafter insulation and for ceiling areas as well as on stud walls and substructures. The board is free from harmful substances and is easy to install. The three interconnected capillary-active insulating layers, consisting of a layer of almost stationary air columns in a special, climate-chamber, cell structure enclosed within two wood fibre layers, harmonize perfectly.

This sandwich structure guarantees flexural rigidity without any warping of the surface when used with plasters or blown-in insulation. In a test report, the airborne noise measurements before and after the installation show a halving of the incident sound energy, despite the slim construction. **UdiCLIMATE[®]** is the natural alternative to traditional cladding options.

→ The advantages

- Highly insulating despite its slim construction
- easy one-man installation
- can be coated with loam/clay and lime plasters
- maintains the room climate and absorbs cold radiation
- up to 80 cm centre-lines with offset mounting pattern

Technical Data **UdiCLIMATE[®] SYSTEM**

Format	115 x 75 cm
Insulation thickness	30 mm
Coefficient of thermal resistance R	0.604 m ² KW
Weight per board	ca. 4.65 kg
Vapour diffusion resistance	5
Apparent density wood-fibre layer	210 kg/m ³
Euroclass fire rating DIN EN 13501-1:	E
Vapour retardation value with UdiFOUNDATION COAT	ca. 1 Meter

Test report: MFPA Nr. PB.4.2/16-154-1


Components:

66.0 % natural fibres from coniferous waste wood
31.0 % Kraft paper from natural wood
1.5 % Sodium silicate
0.5 % Marble dust and binding agent

UdiFLEX[®] SYSTEM

FLEXIBLE

Plan and insulate flexibly – to meet the highest demands

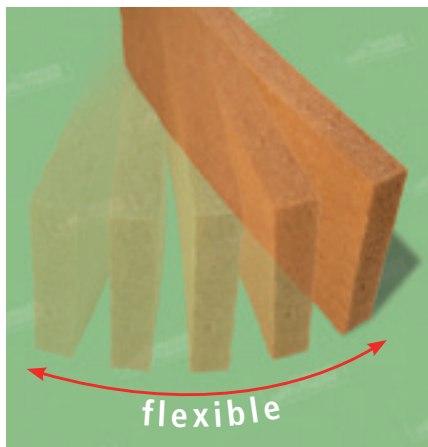

Suitable for use in the following areas
(in accordance with EN 4108-10):



Insulation of
timber-framed
constructions



Insulation
between
rafters and
battens

Due to its snug-fitting characteristics and resistance to settling, it fits into any void. UdiFLEX[®] is kind to the skin and does not cause any irritation. In combination with our special UdiSTEAM[®] SYSTEM it is possible to create insulated constructions which are vapour permeable but also air-tight. Moisture is absorbed and then released again without affecting the building structure or the properties of the insulation. Buildings insulated with the UdiFLEX[®] remain cooler for longer in the hot summer months. A heat shield of over 10 hours is possible with an insulation thickness of only 20 cm – without the need to use any extra air-conditioning systems.

→ The advantages

- Regulates the air moisture due to its high absorbency
- Large thermal storage capacity for summer heat shielding
- Resonance-free acoustic absorption due to the fibre structure
- Kind to the skin and irritation-free
- Simple to use – suitable for a wide range of applications
- Adaptable to all construction situations

Technical data UdiFLEX[®] SYSTEM

Thermal conductivity Declared value λ_D DIN EN 13 171

0.038 W/mK

Thermal conductivity Design value λ

0.039 W/mK

Euroclass fire rating DIN EN 13501-1

E

Apparent density

ca. 55 kg/m³

Vapour diffusion resistance

1

Specific enthalpy capacity c

2100 J/kg K

Components:

93% softwood fibres, ca. 7 % Polyolefin binding fibres and traces of ammonium phosphate fire retardant agent



UdiFLEX fits into every gap



UdiTOP[®] SYSTEM

The complete program for your roof



A third of the energy generated to heat a house is lost through an uninsulated roof. Whether you own an old house or are planning to build a new one, the **UdiTOP[®]** provides you with a vapour permeable roof construction that insulates and blocks the radiation of the cold from the outside, thereby ensuring that the interior remains warm. The insulation boards can also be installed as an extra insulating layer on rear-ventilated façades.

The **UdiTOP[®] SYSTEM** deliberately does not employ water vapour barriers thereby ensuring that the roof can breathe - allowing a natural moisture exchange between the interior and exterior air. This creates a warm, comfortable, room climate and combats the development of mould. The **UdiTOP[®] SYSTEM** combines environmental-friendliness with comfort. This sophisticated combination of thermal insulation and vapour permeability provides an outstanding insulation solution, regardless of whether it is for installation on top of or between the rafters or for cladding constructions. The health-promoting properties of the **UdiTOP[®] SYSTEM** combined with its excellent building physics values makes it the right insulation system for you and your property!



Technical Data UdiTOP[®] SYSTEM

Parameters / Test Standard	Classification	
	UdiTOP [®]	UdiTOP [®] Premium
Thermal conductivity λ_D DIN EN 13171	0.048	0.046 W/mK
Design value	0.050	0.048 W/mK
Fire behaviour classification DIN EN 13501-1	E	E
Apparent Density EN 1602	ca. 270	ca. 240 kg/m ³
Compressive strength	≥ 200 kPa	≥ 100 kPa
Water vapour diffusion resistance coefficient EN 12667 μ	5	5
Specific enthalpy capacity c DIN EN ISO 10456	2100 J/kg K	2100 J/kg K

Components

Natural coniferous waste wood, lignin binding agent
Waste Code EWC-Code 030105

Manufacture and conformity control

EN 13 171

Available insulation thicknesses:

UdiTOP[®]: 22, 35, 52, 60 mm


UdiTOP[®] Premium: 60, 80, 100, 120 mm



UdiTOP[®] – summertime heat shielding and windproofing combined in one product

UdiSTEP® SYSTEM


Insulation system for warm, sound-absorbing, floors



UdiTHERM® SK
With flat edges
Living areas



UdiSTEP® 8
Beneath laminate flooring



UdiTHERM® strong
Pressure-resistant, beneath
screed
Business premises



UdiTHERM® NF
With tongue and groove
edges
Living areas

This insulation system offers a wide range of products for all floor areas, from the floor of a ventilated roof area to insulating under a laminate floor covering. Here you will find an individual insulation board solution that is right for you. Due to its high compressive strength, the system is applicable universally and is equally ideal for various types of floor constructions. You'll feel the natural difference to standard insulation boards.

➔ The advantages

- ➔ Sound insulating
- ➔ Footfall-noise absorbent
- ➔ Available in various combinations from 8 to 200 mm
- ➔ Heat retaining

UdiSTEP® SYSTEM for loft floors (limited loading/tread weight)


Example construction from top to bottom

UdiTHERM® strong 80 mm

UdiTHERM® SK 80 mm

Unfinished or existing floor, e.g. for standard, timber joist floors or concrete with a moisture retarder membrane

Installation example:

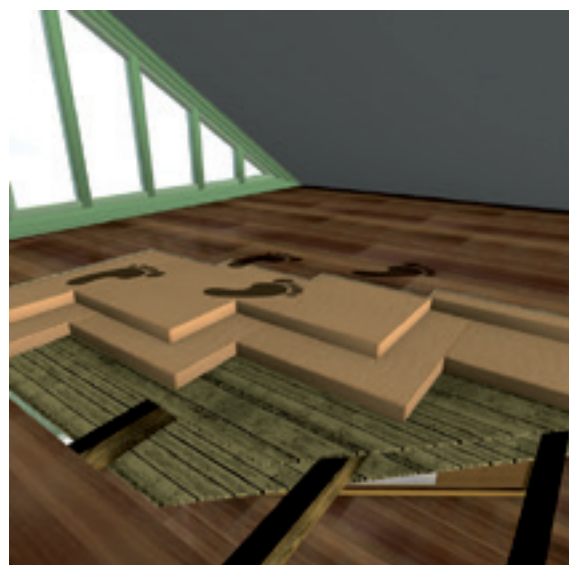

UdiSTEAM[®] SYSTEM

Efficient and ecological, air- and wind-tight sealants




Wind sealant sheeting, vapour retarders and specially developed adhesives

After many years of research and development work in the area of thermal optimisation, **UdiDÄMMSYSTEME** have managed to achieve a symbiosis between functionality and efficiency with our **UdiSTEAM[®] SYSTEM**. This reliable system provides a high level of air-tightness whilst ensuring that the building remains vapour permeable. Our economical vapour retarders and wind sealant sheeting, combined with our specially developed adhesive systems, provide a comprehensive range of solutions in order to protect your house from the effects of external and internal moisture ingress.

Our wide range includes high-performance vapour retarders made from Kraft-paper and also modern, 'intelligent' vapour retarders with moisture variable SD-values between 1 and 12 metres which adapt to the humidity level. If desired, the sheets can be joined together using our special, flexible, adhesive tapes or permanently bonded using liquid adhesive. Comprehensive laboratory tests and practical experience have confirmed the long-term functionality of our products and ensure ease of installation and a structurally secure construction.

MOISTURE-ACTIVE

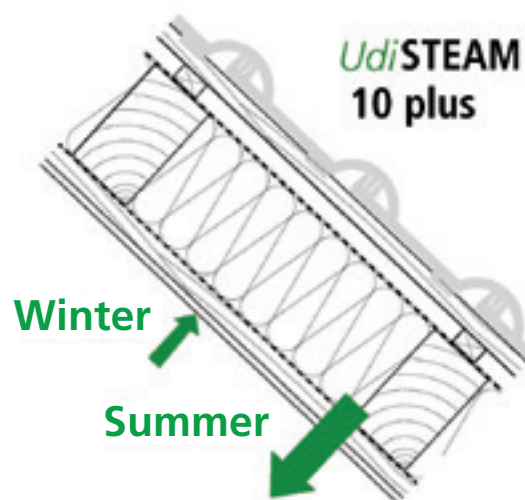

Structurally perfect and energy-saving



UdiSERVICE

UdiDELIVERY

Our efficient logistics system guarantees quick deliveries and the permanent availability of our products and systems wherever they are needed – regardless of whether you need a box of fixings or full truckload of insulation boards.



UdiCONTACT

Under the telephone number +49 (0) 371-33 71 38 0 you can reach our team of specialists who will be happy to answer your questions relating to **UdiINSULATION SYSTEMS** and **UdiBUILDING PRODUCTS**.



UdiPLANNING

UdiDÄMMSYSTEME offers a complete service providing building physics expert knowledge and information on the statutory requirements relating to the insulation market. In order to help you calculate the material need for your project, we provide a comprehensive calculation help program in the internet.



UdiTRAINING

In our training centre at the **UdiDÄMMSYSTEME** Company HQ, our team offers a comprehensive training and education program for all interested parties such as architects, planners, energy advisors or tradesmen, developers, students or apprentices. Tradesmen can also obtain an installers license.

**BECOME A
LICENSED PARTNER**



The UdiGUARANTEE – an overview

Our **UdiFRONT®** and **UdiIN®** insulation systems are manufactured to the highest quality standards and all components are optimally matched. They are subject to continuous quality controls. If all the original **UdiComponents** are used and the system is correctly installed by a licensed **UdiCERTIFIED INSTALLER**, we provide a 15-year guarantee covering the functionality of the system and the following properties: no development of cracks, no mould growth in the construction, no bulging or warping of the surfaces and an unrestricted choice of colours for the façade.

**OPTIONAL
15-YEAR
GUARANTEE**



UdiENVIRONMENT

Our **UdiPRODUCTS** insulation materials are manufactured exclusively from softwood waste fibres from renewable sources. In 1999, our façade insulation system **UdiFRONT®** was tested and recommended by the leading German ecological consumer magazine "Öko-Test" as the 'best in class' thermal insulation system. Our renewable insulation materials absorb large quantities of CO₂ during the growth phase and keep it stored permanently during use. These are significant advantages over insulation products that are produced from oil. All waste material and off-cuts can be disposed of or composted without any problems.



UdiDATA

Technical and safety data sheets, test certificates and official Building Inspectorate approvals for all of the products and systems offered in this brochure are available, upon request, in printed form or can be downloaded from our homepage under www.udidaemmsysteme.de.




UdiINSULATION SYSTEMS

in use – Example calculations

WALL – Solid brickwork (older/existing building), plastered on both sides – FAÇADE INSULATION

BEFORE

Construction from the interior to the exterior

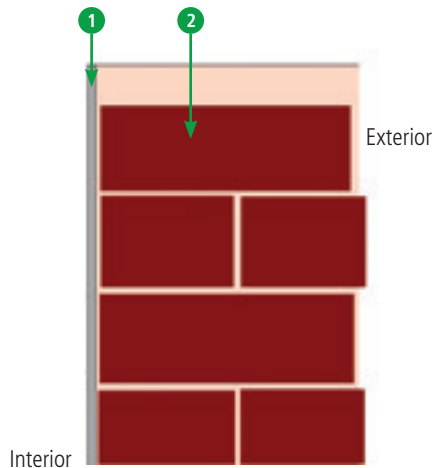


- 1 Interior lime plaster 15 mm
- 2 Traditional solid brick 365 mm

U-value: 1.51 W/m²K
 Phase change: 12.9 hrs.
 Surface temperature: 14.1° C



AFTER

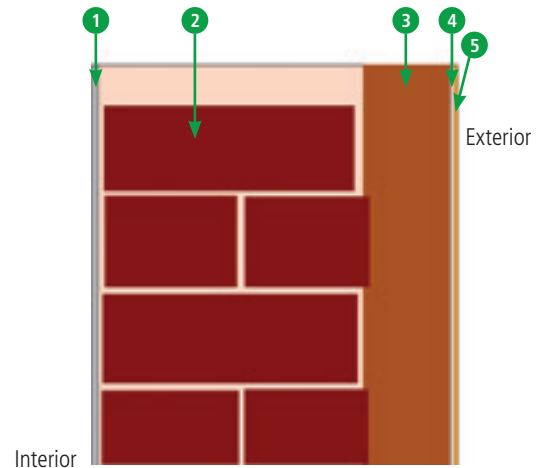


- 1 Interior lime plaster 15 mm
- 2 Traditional solid brick 365 mm
- 3 Udi/RECO® Insulation system 160 mm
- 4 Udi/FOUNDATION COAT® 5 mm
- 5 Udi/PERL® Fine plaster 2 mm

0.22 W/m²K
 19.5 hrs.
 19.1° C



Temperature and moisture profile

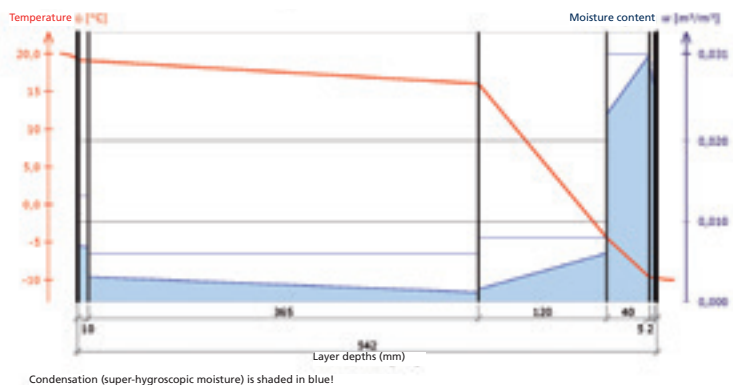

This construction configuration meets the current German energy-efficiency regulations' standards. An improvement of around 85 %, based on the insulated external surface, was achieved. The summertime heat shielding increased by around 5 hours. The construction remained vapour-permeable and capillary-active. The room climate was maintained.

Explanation:

The U-value (formerly the k-value) is the unit for the thermal insulation properties of building elements. The phase change denotes the time (in hours) for the afternoon heat maximum to progress from the exterior to the interior of the construction. This value is decisive in assessing the summertime heat shielding of building elements. The surface temperature is dependent on the characteristics of usage for the building.




UdiINSULATION SYSTEMS

in use – Example calculations

WALL — Solid brickwork (older/existing building), plastered on both sides — INTERIOR INSULATION

BEFORE

Construction from the interior to the exterior

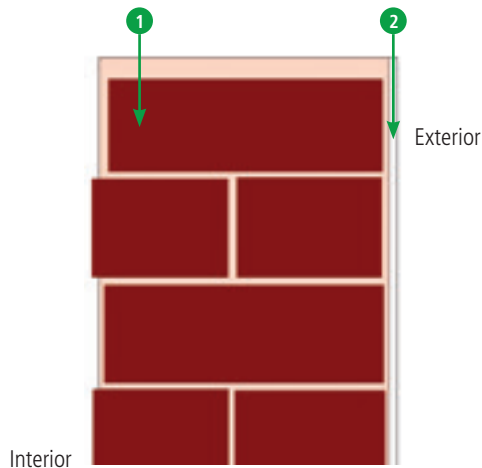


- 1 Traditional solid brick 365 mm
- 2 Exterior mineral plaster 10 mm

U-value: 1.51 W/m²K
 Phase change: 12.9 hrs.
 Surface temperature: 14.1° C



AFTER

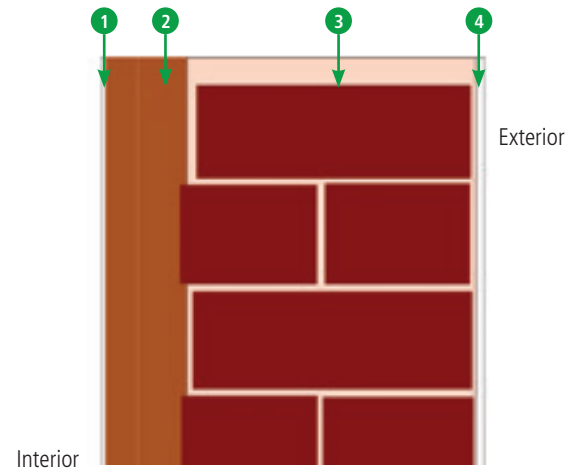


- 1 UdiFOUNDATION COAT® 5 mm
- 2 UdiIN RECO® Insulation system 100 mm
- 3 Traditional solid brick 365 mm
- 4 Exterior mineral plaster 10 mm

0.34 W/m²K
 19.5 hrs.
 18.7° C



Temperature and moisture profile

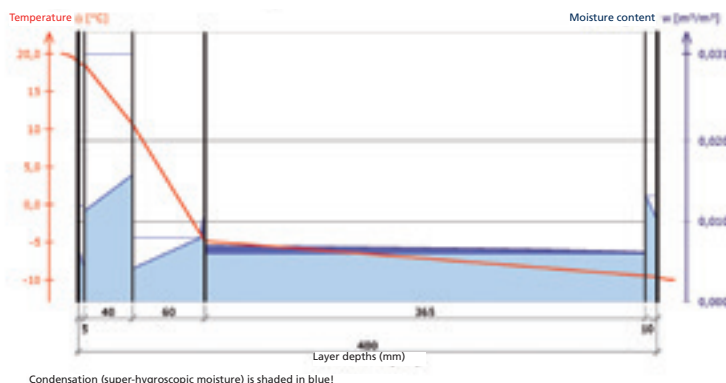

This construction configuration meets the current German energy-efficiency regulations' standards. An improvement of around 77 %, based on the insulated external surface, was achieved. The summertime heat shielding increased by around 5 hours. The construction remained vapour-permeable and capillary-active. The room climate was maintained.

Explanation:

The U-value (formerly the k-value) is the unit for the thermal insulation properties of building elements. The phase change denotes the time (in hours) for the afternoon heat maximum to progress from the exterior to the interior of the construction. This value is decisive in assessing the summertime heat shielding of building elements. The surface temperature is dependent on the characteristics of usage for the building.




UdiINSULATION SYSTEMS

in use – Example calculations

ROOF – RENOVATION

BEFORE


Construction from the interior to the exterior

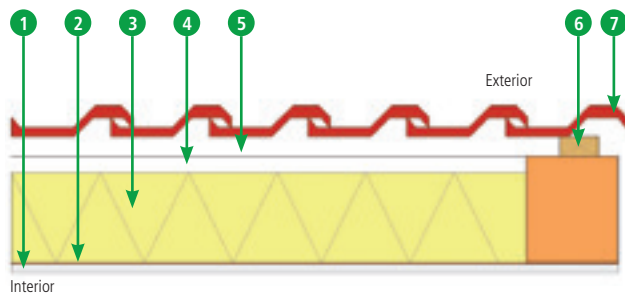

- 1 Gypsum board 12,5 mm
- 2 Vapour retarder membrane 0,3 mm
- 3 Mineral wool 120 mm
- 4 Air layer 20 mm
- 5 Membrane 0,5 mm
- 6 Rear-ventilated battens 25 mm
- 7 Roof covering

U-value: 0.41 W/m²K
 Phase change: 5.0 hrs.
 Temperature-amplitude-ratio (TAV) 0.36 (36 %) 


AFTER

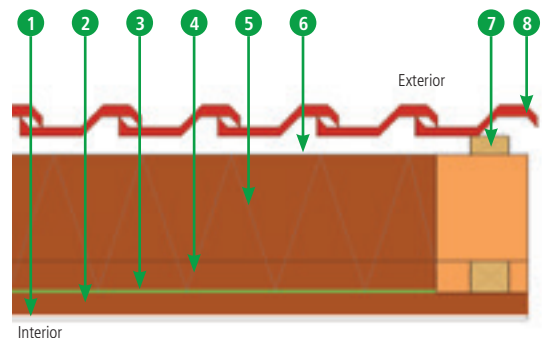

- 1 UdiFOUNDATION COAT® 5 mm
- 2 UdiCLIMATE® 30 mm
- 3 UdiSTEAM® 10 plus 1 mm
- 4 UdiFLEX® Insulation board flexible 40 mm
- 5 UdiFLEX® Insulation board flexible 140 mm
- 6 Membrane 0,5 mm
- 7 Rear-ventilated battens 25 mm
- 8 Roof covering

U-value: 0.23 W/m²K
 Phase change: 10.5 hrs.
 Temperature-amplitude-ratio (TAV) 0.076 (8 %) 

Temperature and moisture profile

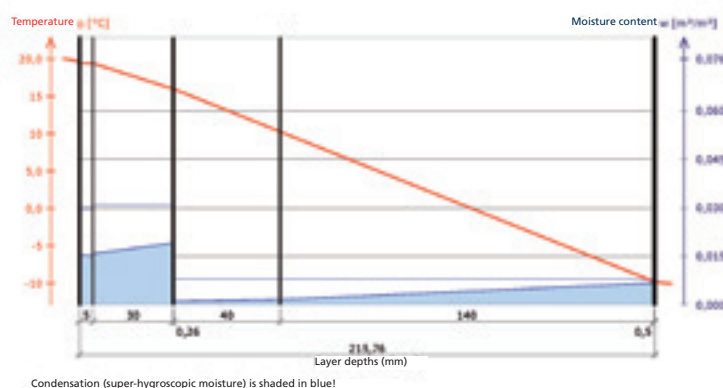

This construction configuration meets the current German energy-efficiency regulations' standards. An improvement of around 43 %, based on the insulated external surface, was achieved. The summertime heat shielding increased from 5 hours before to 10.5 hours after. The construction remained vapour-permeable and capillary-active. The room climate was maintained.

Erläuterungen:

The U-value (formerly the k-value) is the unit for the thermal insulation properties of building elements.

The phase change denotes the time (in hours) for the afternoon heat maximum to progress from the exterior to the interior of the construction.

The temperature-amplitude-ratio (TAR) is the temperature difference of the inner surface divided by the temperature difference of the outer surface of a particular building element.

The last two values are decisive in assessing the summertime heat shielding of building elements.




UdiINSULATION SYSTEMS

in use – Example calculations

ROOF – NEW CONSTRUCTION

Construction from the interior to the exterior

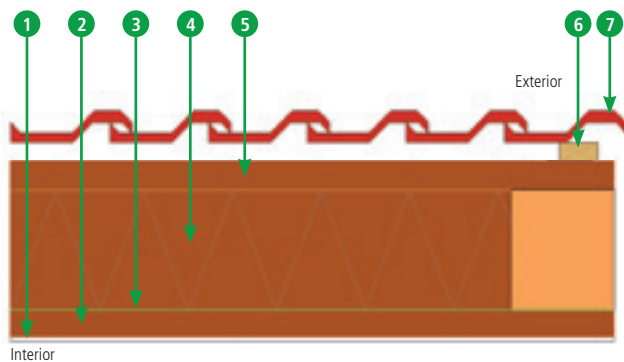


- 1 UdiFOUNDATION COAT® 5 mm
- 2 UdiCLIMATE® 30 mm
- 3 UdiSTEAM® 10 plus 0,26 mm
- 4 UdiFLEX® Insulation board flexible 140 mm
- 5 UdiTOP® 35 mm
- 6 Rear-ventilated battens 25 mm
- 7 Roof covering

U-value: 0.23 W/m²K
 Phase change: 11.2 hrs.
 Temperature-amplitude-ratio (TAV) 0.025 (3%)



Temperature and moisture profile

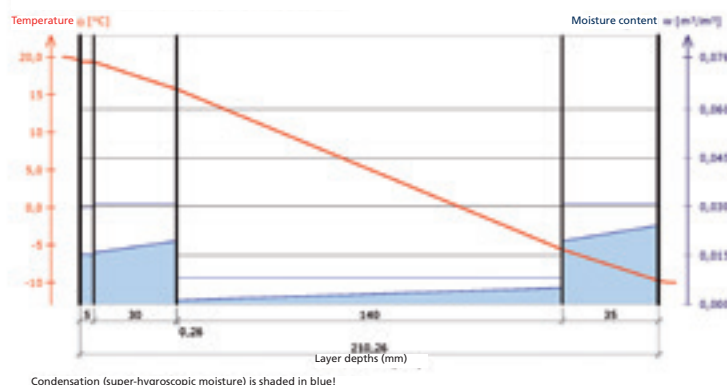

Condensation (super-hygrosopic moisture) is shaded in blue!

This construction configuration meets the current German energy-efficiency regulations' standards. The level of summertime heat shielding achieves an optimal value of over an 11-hour phase change. The whole roof construction is planned to be completely vapour-permeable and capillary-active. This leads to a stable, uniform room climate under the roof.

Erläuterungen:

The U-value (formerly the k-value) is the unit for the thermal insulation properties of building elements.

The phase change denotes the time (in hours) for the afternoon heat maximum to progress from the exterior to the interior of the construction.

The temperature-amplitude-ratio (TAR) is the temperature difference of the inner surface divided by the temperature difference of the outer surface of a particular building element.

The last two values are decisive in assessing the summertime heat shielding of building elements.



We will prepare a complete and non-binding offer including structural physics calculations for **UdiSYSTEMS®** for your building. Please complete the following form and include a sketch of the cross-section of the wall(s) and send it us either by fax or by post. For window sills, please send us a separate request.

Planner:

Developer:

Contact person:

Contact person:

Address:

Address:

Post code, town, country:

Post code, town, country:

Telephone:

Telephone:

Telefax:

Telefax:

E-Mail:

E-Mail:

1. Select insulation system

- ☐ **UdiRECO®** SYSTEM
 ☐ **UdiIN RECO®** SYSTEM
 ☐ **UdiCLIMATE®** SYSTEM
☐ **UdiIN 2CM®** SYSTEM
 ☐ **UdiSPEED®** SYSTEM
 ☐ **UdiFRONT®** SYSTEM
☐ **UdiIN®** SYSTEM
 ☐ **UdiTOP®** SYSTEM
 ☐ **UdiFLEX®** SYSTEM
☐ **UdiSTEP®** SYSTEM

2. Building

- ☐ Older/existing construction ☐ New construction
☐ Interior insulation ☐ Exterior insulation

Masonry type

- ☐ Perforated bricks/blocks ☐ Solid bricks/blocks
☐ Mixed masonry

Timber construction

- ☐ Timber frame/studs ☐ Solid timber/Log built construction
☐ Pre-fabricated timber construction

Half-timbered

- ☐ External insulation ☐ Infill insulation

Other constructions

☐

3. Required insulation thickness

- ☐ 20 mm ☐ 30 mm ☐ 40 mm
☐ 60 mm ☐ 80 mm ☐ 100 mm
☐ 120 mm ☐ 140 mm ☐ 160 mm
☐ 180 mm ☐ 200 mm
☐ mm according to official recommendation
☐ Insulation recommendation from **UdiDÄMMSYSTEME** requested (see my sketch on opposite page)

4. Determination of quantity requirements

Circumference of the building / the rooms m

Height to the eaves / room height m

Number of building corners (Internal and external) Stück

Number of windows Stück

Number of doors Stück

Area to be insulated *including* windows/doors m²

Window area m²

Door area m²

Effective area to be insulated *without* windows/doors m²

Available space for window reveal insulation

- ☐ 20 mm ☐ 40 mm ☐ 60 mm
☐ 80 mm ☐ 100 mm

Window reveal depth /building shell cm

Total length of window reveals/lintel (without window sill) m

Total length of door reveals/lintel (without doorstep) m

Total length of window sill areas m

Total roof slope length from ridge to wall plate m

Effective area to be rendered/plastered m²

Cross-sectional sketch of planned wall construction (please show the correct dimensions)																	

5. Surface / final coating

- ☐ Scratched surface structure – Granularity _____ mm
- ☐ Rubbed surface structure – Granularity _____ mm
- ☐ Smooth plaster

☐ UdiLIVE® Fine plaster system (for interior use, coloured)

☐ UdiPERL® Fine quality façade paint

6. Paint/colour

- ☐ UdiCOLOR® System _____
- ☐ Special paint/colour _____

7. Special options

- ☐ UdiALU® Aluminium Window Sills
 - ☐ uncoated ☐ dark anodised
 - ☐ silver anodised ☐ RAL-coated

8. Installers and merchants

- ☐ Addresses of licensed UdiCERTIFIED INSTALLER
- ☐ Addresses of UdiSYSTEM MERCHANTS

9. Contact

- ☐ Prompt technical telephone support
- ☐ Technical field service with on-site advisory service

10. Training

- ☐ I am interested in your seminars.
Please send me details.

11. My comments

Town, Date

Signature **X** _____

Tests /Approvals/ Fire protection / Background information


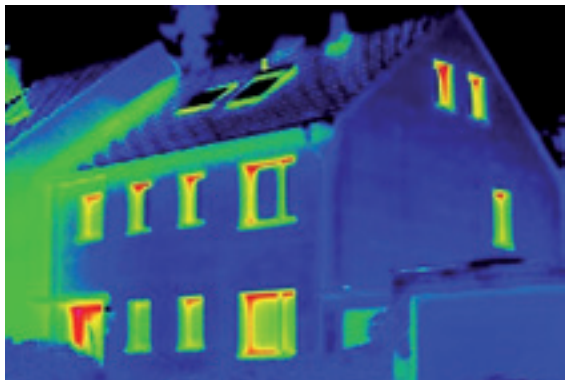


Photo: RPO

The **UdiFRONT® ETIC system** was evaluated in a research project on effective physical moisture protection measures conducted by the Technical University, Dresden. The simulation, over a 5.5 year period, on the behaviour of moisture in timber constructions with directly cladded, timber frames, for a west facing wall subjected to the climate in Essen, Germany, provided the following results: No moisture in the insulation; all processes confirm the capillary effect of the wood-fibre ETICS.

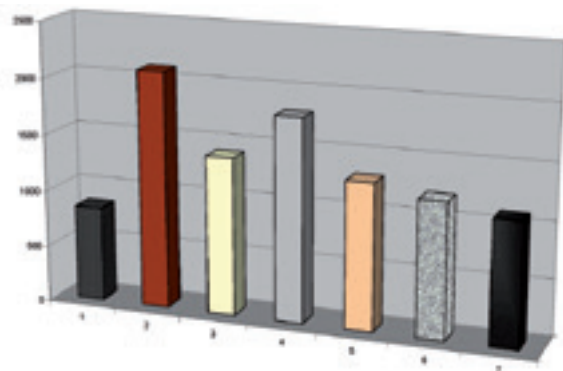


	UdiFRONT® Insulation system 60 mm Space saving*: 94 %
	Timber wall 200 mm Space saving*: 80 %
	Traditional brick wall 450 mm Space saving*: 55 %
	Concrete wall 1.020 mm Space required 100 %

➔ Thermal imaging test

The thermal imaging analysis of buildings provides useful information on the thermal condition of the building. Building elements with different wall temperatures are clearly visible. The picture of the house shows image sections that are characteristic for the thermal condition of the building. The thermal images after the renovation did not show any significant areas of thermal losses.

Explanation of the thermal imaging method

The temperature of all areas of a building's skin are measured and displayed optically as coloured regions e.g. red, green, yellow, blue. The lighter the colour e.g. yellow, red, the greater the heat loss.

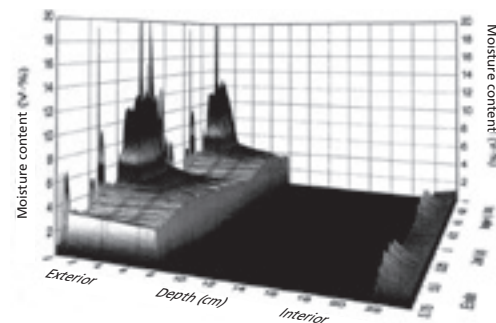

Computational simulation over 5.5 years. Direct cladding **UdiFRONT® ETICS** on timber frame. The rise and fall of the moisture in the construction over the seasons is clearly recognizable.

Thermal insulation values

The graph on the left shows how various selected insulation materials provide protection against the winter cold. A 6cm layer of the **UdiFRONT®** and **UdiSPEED®** wood-fibre insulation systems insulates as well as 102 cm of concrete! When comparing insulation materials not only the U- and λ -values but also the thermal storage capacities should be considered. **UdiFRONT®** and **UdiSPEED®** wood-fibre insulation boards exhibit excellent values when compared with other options.

Selected insulation materials and the various thermal storage capacities (**UdiFRONT®** is shown in brown).

UdiFRONT®

offers an optimal use of the construction space. The thinner the wall, the more living space is available for the same level of energy efficiency.

Example: An identical u-value is provided by a 36 cm thick perforated brick wall or a timber-frame wall insulated with a 6 cm thick **UdiFRONT® SYSTEM**. This means a practical saving of 5.5 m² of living space (based on a house with a floor area of 120 m²)


* compared to concrete wall



Fire protection

Within the scope of the tests required for the European Technical Approval, the **UdiFRONT® ETICS** system was classified in the building materials class B-s2,d0 according to EN 13501-1:2017 + A1:2009. Due to a statutory re-organisation, this approval was not extended. The properties of the boards remain however unchanged.

- No toxic gas emissions
- No undefined spreading of fire
- Extinguishes flames itself
- No spalling of the plaster

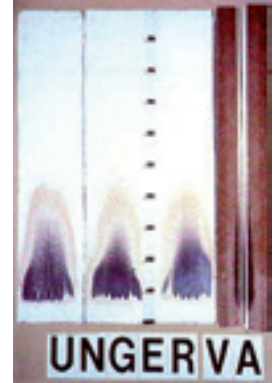

General Building Inspectorate approval from the DIBt in Berlin

General Building Inspectorate approvals

UdiINSULATION SYSTEMS, so-called ETICS (External thermal insulation composite systems) are officially regulated in a General Building Inspectorate approval from the German Inspectorate for Building Technology (DIBt) or a European Technical Approval (ETA) because these building elements are subject to safety restrictions.


Currently, the approvals are only issued for a period of five years and contain the following:

- Description of the ETICS and the areas of application
- Description of the properties and the composition of all the system-relevant components e.g. the insulation, the plaster components, the paint and accessories
- Production, packaging, transport, storage and designation/labelling
- Certificate of compliance
- Rules for the design and measurement
- Rules for the installation
- Handover certificate to confirm the system has been correctly installed

The proof of usability for the individual **UdiINSULATION BOARDS** is regulated according to the requirements of the European standard EN 13171. This is confirmed by the award of the CE-label. Assurance of the lasting quality of the **UdiINSULATION BOARDS** and **UdiINSULATION SYSTEMS** is ensured through third-party monitoring by recognized test, monitoring and certification bodies.

Getting a grip on heating costs

It's clear to everyone that insulation helps to save energy but many people are also interested in how long it will take before it pays for itself. Using our own specially developed simulation program we can determine the likely amortization point at which the savings pay for your investment. A well planned and correctly installed insulation measure usually pays for itself in only a few years.

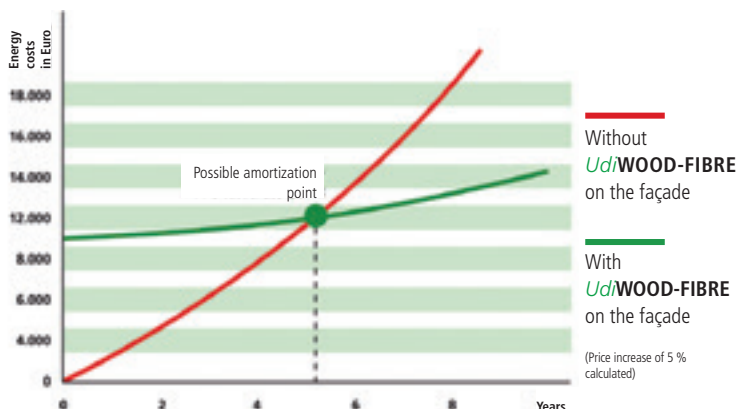

Example of an old, brick-built building with 100 mm **UdiFRONT®** façade insulation.

At the end of the 90's ÖKO-TEST compared 17 insulation systems

In the issue 04/99 the acclaimed ecological, consumer magazine ÖKO-TEST published the results of the evaluation of 17 different ETICS systems.

Only three systems were awarded the best mark "Recommended"

One of them was **UdiFRONT**.



Reference Buildings – Historical Buildings in Germany



Water tower Süptitz near Leipzig

Project: Complete renovation 2011

Built: 1890

Building use: Residential and business premises

UdiIN RECO 80 und 100 mm interior insulation



Old water mill in Noßdorf near Cottbus

Project: Complete renovation 2007

Built: 1624

Storeys: Partial cellar, two storeys, loft conversion

Building use: Public museum / Residential building

UdiIN 60 mm interior insulation



Reference Buildings – Historical Buildings in Germany



Magnificent villa in Altchemnitz

Project: Complete renovation 2003

Built: 1890

Storeys: Cellar, two storeys, loft conversion

Building use: Residential and business premises

UdiIN System 80 mm interior insulation



Gothic journeyman's hostel, next to the Albrechtsburg in Meissen

Project: Complete renovation with interior insulation 2001 -2003

Built: 1501

Building use: Private residential building

UdiIN System 60 mm interior insulation



Reference Buildings – Historical Buildings in Germany



The founder's house – Margarete Steiff, soft toy manufacturer in Giengen/ Brenz



Project: Complete renovation 2007

Built: 1874

Building use: Today used as a museum with shop and factory

UdiInsulation systems Interior and exterior insulation



Before



After



Vierseitenhof in Schellenberg/Erz mountains

Project: Interior insulation with integrated wall heating 2013

Built: um 1860

Storeys: 3 floors

Building use: Residential building with a partial half-timbered structure

UdiIN System 120 mm and 80 mm / **Udi**MULTIGRUND loam/clay plaster



Reference Buildings – Historical Buildings



Half-timbered building, Jägermeister Mast AG in Wolfenbüttel, Germany

Project: Complete renovation with interior insulation
on 1998 - 2001

Built: Around the 15th century

Building use: Business premises

UdiIN system 60 and 100 mm interior insulation



Renowned inner-city location, Luxemburg

Project: Interior insulation 2012

Built: Around the 19th century

Storeys: 5 floors

Building use: Residential and office premises

UdiIN RECO system 100 mm with Udi-
FOUNDATION COAT and fine lime plaster



Reference Buildings – Newly constructed timber-framed buildings (Germany)



Building: Leipzig-Neukiritsch / Saxony (Newly constructed timber-framed building with **UdiFRONT**® 60 mm)



Building: Berlin school Bad Nenndorf / Lower Saxony (Solid masonry building with projecting façade **UdiSPEED**® 40 mm)



Building: Day nursery, Oberursel in the Taunus region / Hessen (Newly constructed timber-framed building with **UdiFRONT**® 80 mm)



Building: BAUFRTZ Munich-Eichenau / Bavaria (Solid timber with timber-frame combination and **UdiFRONT**® 60 mm)



Reference Buildings – Historical Buildings in Germany



The worsted yarn spinning mill in Brandenburg

Project: Renovated 2016


Converted to 15 luxurious, holiday, loft apartments

Building type: Striking brick structure with a listed façade (preservation order)

Built: 1881

Building use: Business premises

UdiIN RECO: 100 mm with Multigrund and loam/clay, insulated internally

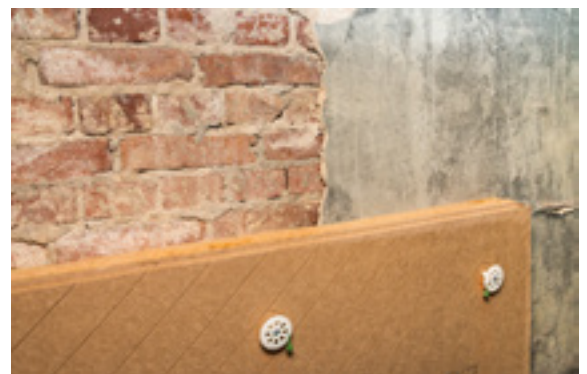

Reference Buildings – Germany



→ Lübeck

Schleswig Holstein

Winner of the KfW-Award
(Reconstruction loan Corporation)
Insulated with 160 mm **UdiRECO**



→ Hannover

Lower Saxony

Private house
Timber-framed new construction
Façade insulated with 40 mm **UdiSPEED**



→ Bad Hindelang

Bavaria

Hotel renovation
Façade insulated with 160 mm **UdiRECO**



→ Neu Anspach

Hessen

Hotel and tourist centre
New construction
Façade insulated with 60 and 100 mm
UdiFRONT Various constructions

Reference Buildings – Europe



Bagnols en Forêt



France

Passive house in the South

Façade insulated with 200 mm *UdiRECO*



Prag



Czech Republic

Renovation of residential block

Façade insulated with 200 mm *UdiRECO*



Piacenza



Italy

Private house

Façade insulated with 100 mm *UdiRECO*



London



Great Britain

Somerset House

Roof insulated with *UdiFLEX* and *UdiSTEAM*



OUR SYSTEM RANGE:

For the roof:

UdiFLEX® SYSTEM

Flexible planning with a flexible insulation to meet the highest of demands

UdiTOP® SYSTEM

The complete program for your roof

For the façade:

UdiRECO® SYSTEM

External thermal insulation composite system with intelligent levelling compensation

UdiFRONT® SYSTEM

External thermal insulation composite system with a 15 year guarantee

UdiSPEED® SYSTEM

The efficient insulation system for pre-fabricated, timber-frame buildings

For interior insulation:

UdiIN® SYSTEM

Interior insulation system with a 15 year guarantee

UdiIN RECO® SYSTEM

The interior insulation system – specially designed for uneven surfaces

UdiIN 2CM® SYSTEM

The quick and slim internal insulation system


For interior construction:

UdiCLIMATE® SYSTEM

The interior insulation system with integrated climate chambers

UdiSTEP® SYSTEM

Wood-fibre, floor insulation

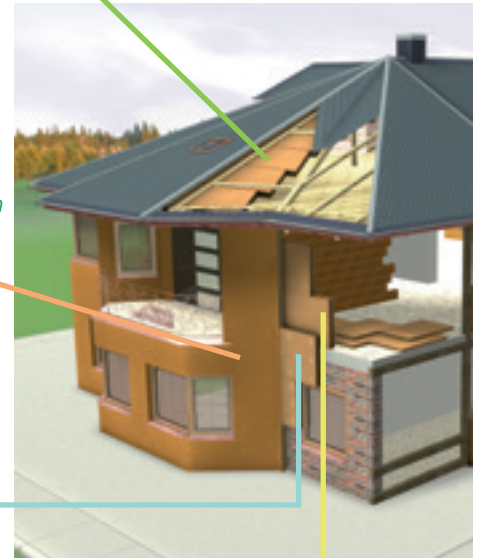

UdiDÄMMSYSTEME GmbH

Oberfrohnauer Straße 2

09117 Chemnitz

Telephone: +49 (0) 371 - 33 71 38 0

Telefax: +49 (0) 371 - 33 71 38 64

E-Mail: info@udidaemmsysteme.de

We are always happy to advise you: